
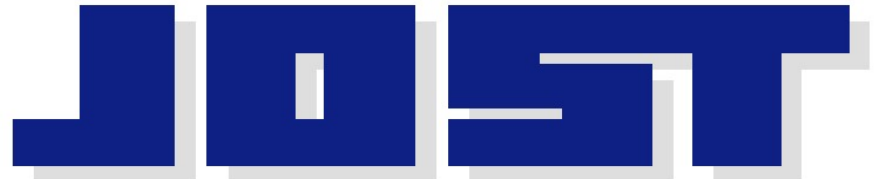

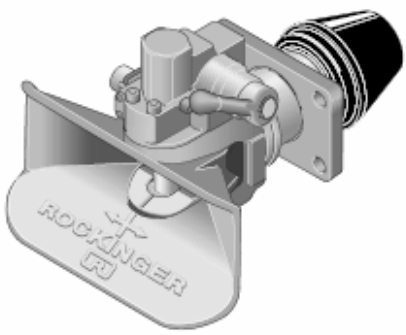
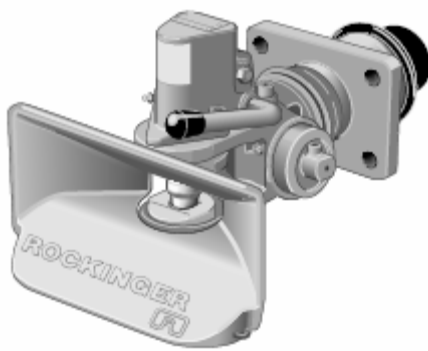
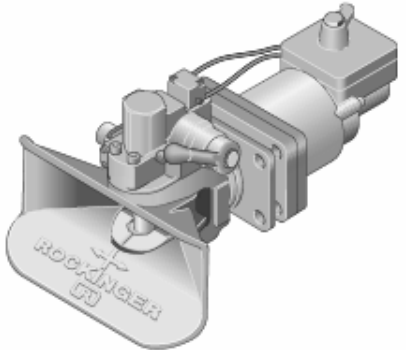
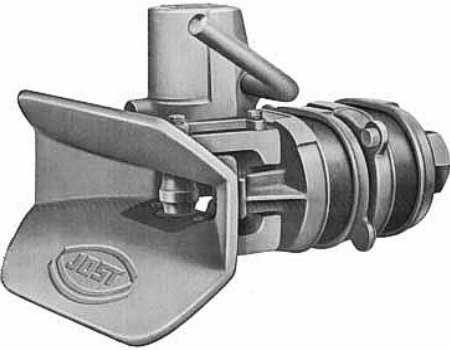


**ROCKINGER**

Member of JOST-World

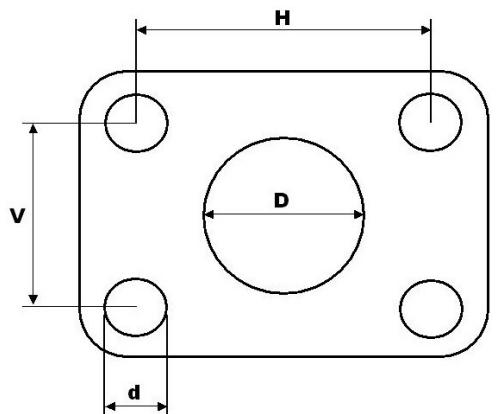

## Guidelines to 40mm Automatic Trailer Coupling selection

Picture	Type & features	Specifications	Applications
	<p><b>Rockinger Type RO*243</b></p> <p>Compact coupling Head can be dismantled Replaceable wear parts DIN 74054 CE/94/20</p>	<p>D-value = 30 kN Weight = 4,1 &amp; 4,4 kg Drilling pattern</p> <ul style="list-style-type: none"> <li>• 83 x 56 x 10,5</li> <li>• 120 x 55 x 15</li> </ul>	<p>Typically suited to light trucks, delivery vans and cross country vehicles. Truck GVM = 5T max Trailer GVM = 20T max</p>
	<p><b>Rockinger Type RO*400</b></p> <p>Head can be dismantled Replaceable wear parts DIN 74054 CE/94/20</p>	<p>D-value = 70, 100 &amp; 130 kN V-value = 26, 31 &amp; 35 kN Weight = 30, 34 &amp; 35 kg Drilling pattern</p> <p>G135 - 120 x 55 x 15mm G145 - 140 x 80 x 17mm G150 - 160 x 100 x 21mm D = 74, 84 &amp; 94mm</p>	<p>General on-road/off-road All road conditions Specifically suited to centre axle drawbar trailers</p>
	<p><b>Rockinger Type RO*42</b></p> <p>Vertical articulating head Head can be dismantled Replaceable wear parts DIN 74054 CE/94/20</p>	<p>D-value = 70, 100 &amp; 120 kN Weight = 32, 36 &amp; 38 kg Drilling pattern</p> <p>G235 - 120 x 55 x 15mm G240 - 140 x 80 x 17mm G250 - 160 x 100 x 21mm D = 74, 84 &amp; 94mm</p>	<p>Specifically suited to arduous off-road conditions as head can articulate 45° up- and 90° downwards and 90° to the left and the right</p>
	<p><b>Rockinger TYPE RO*430</b></p> <p>Comfort, slack free, with buffers, dampened Head can be dismantled Replaceable wear parts Support load = 1 000 kg</p>	<p>D-value = 100 &amp; 130 kN V-value = 36 kN Weight = 32, 36 &amp; 38 kg Drilling pattern</p> <p>145 - 140 x 80 x 17mm 150 - 160 x 100 x 21mm D = 84 &amp; 94mm</p>	<p>General on-road/off-road All road conditions</p>
	<p><b>JOST JAK22</b></p> <p>Large rubber cushions Rotating coupling pin Head can be dismantled Replaceable wear parts Softer ride</p>	<p>D-value = 130 kN Weight = 31,6 kg Drilling pattern</p> <ul style="list-style-type: none"> <li>• H = 160mm</li> <li>• V = 100mm</li> <li>• d = 21mm</li> <li>• D = 95mm</li> </ul>	<p>Specifically suited to general on-road conditions Not suited to centre drawbar axle applications</p>
	<p>H = Horizontal centre distance between mounting holes V = Vertical centre distance between mounting holes D = Hole diameter to accommodate mounting shaft d = Hole diameter to accommodate mounting bolts Please note: - Other couplings available upon request Please contact us for availability Website: - <a href="http://www.jost-world.com">www.jost-world.com</a></p>		