
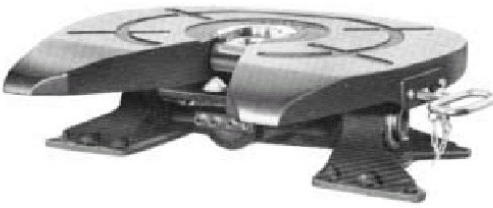
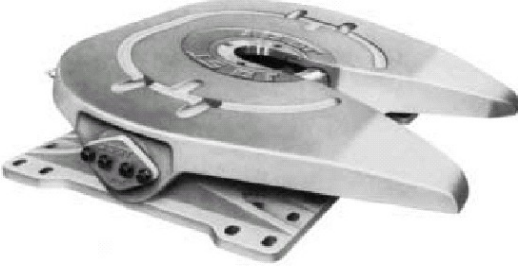


# TRANSPORT EQUIPMENT



## Guidelines to 3½ " Fifth wheel selection

Picture	Type & features	Specifications	Applications
	<p><u>JSK38C</u></p> <p>Replaceable wear parts Cast steel Suited for 2" and 3½ " king pins Slack free Maintenance free rubber cushions</p>	<p>D-value = 152 kN (2") 260 kN (3½ ") GCM = 134 000kg Imposed load = 36 000 kg Weight = 220 kg Rubber mount Height = 190mm</p>	<p>Heavy duty applications Specifically suited to on-road conditions (Typically mounted on dolly)</p>
	<p><u>JSK38G</u></p> <p>Replaceable wear parts SG Iron Suited for 2" and 3½ " king pins Maintenance free pivot bearings Double oscillating</p>	<p>D-value = 152 kN (2") 260 kN (3½ ") GCM = 160 000kg Imposed load = 36 000 kg Weight = 265 kg Cardinal mount Height = 290mm</p>	<p>Heavy duty applications All road conditions Specifically suited to off-road conditions (Typically mounted on truck tractor)</p>
	<p><u>JSK50</u></p> <p>Replaceable wear parts SG Iron Suited for 2" and 3½ " king pins Free oscillating</p>	<p>D-value = 152 kN (2") 260 kN (3½ ") 300 kN (max) GCM = 200 000kg Imposed load = 50 000 kg Weight = 290 kg Bush and pin mount Height = 190mm</p>	<p>Extra heavy duty applications General applications All road conditions</p>

### CONTROL DIMENSIONS

JSK38C and JSK38G		JSK50	
Lock jaw	New - 38mm Replace - 36mm	Lock jaw	New - 38mm Replace - 36mm
Wearing ring	New - 37mm Replace -35,5mm	Wearing ring	New - 37mm Replace -35,5mm